


Designed for high volume applications of high viscosity dripless primer material. This pneumatically operated system consists of two 55 gallon double acting dispensers with low level indicators and automatic crossovers.



### General Specifications:

- Dispenses pinch weld primer material directly out of original 55 gallon drum.
- Agitators in both supply drums keep elements in suspension.
- System includes two drum covers which support all of the componentry necessary to each drum.
- A single post air/oil elevator is designed to lift the cover when changing an empty drum.
- Indicators will light and a signal will sound indicating drum is empty.

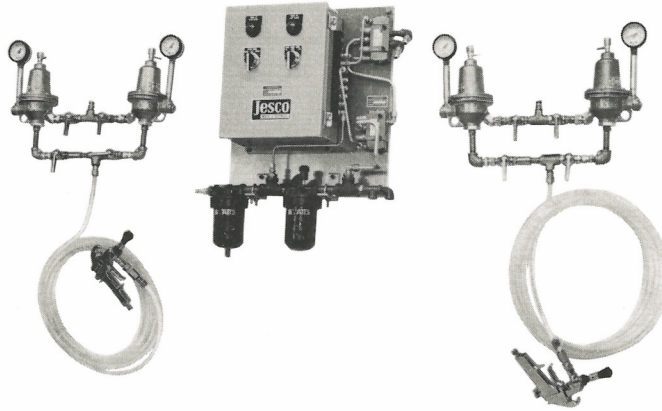

This system is composed of the following components:

- |  |   |   |
|--|---|---|
| (2) N-870-A-55-F double action dispenser.  | (2) N-1958 55 gallon elevator with N-1974 drum cover. | (2) P-5696 dual regulator assembly [to be mounted by customer.] |
| (2) P-5722 55 gallon agitator - tri level. | (1) Low level detector with auto crossover.           | (2) P-5477 applicator gun and brush.                            |

[www.jescoproductsco.com](http://www.jescoproductsco.com)  
[jescoproducts@sbcglobal.com](mailto:jescoproducts@sbcglobal.com)